
PROFESSIONAL GRINDER LUNA GBW | QUICKGUIDE


Hemro International AG Thurgauerstrasse 80 | 8050 Zurich, Switzerland
T: +41 44 864 18 00 | F: +41 44 864 18 01 info@hemrogroup.com | www.hemrogroup.com

Detailed information at:		
Product Page	**Instruction Manual**	**Videos**
https://hemro.net/luna-gbw-product-page-global	https://hemro.net/luna-alba-gbw-instruction-manual	https://hemro.net/luna-gbw-video


Setting Up The Grinder

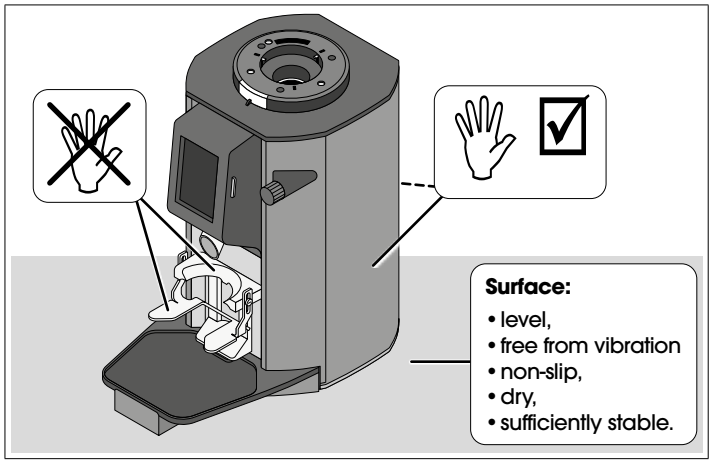


Inserting The Hopper

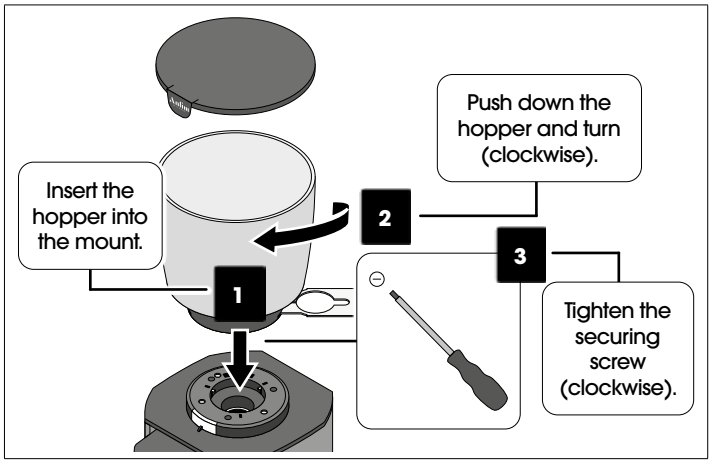


Adjusting The Portafilter Support

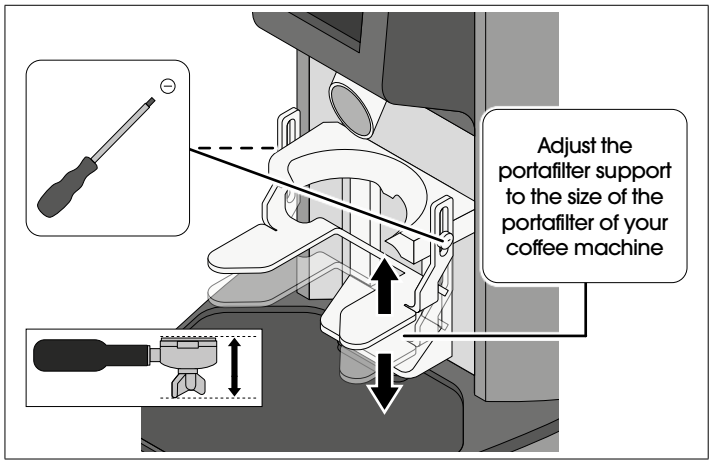


Aligning The Spout

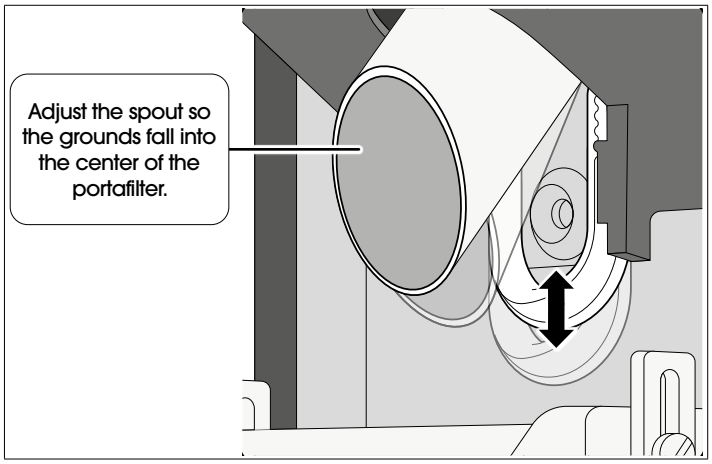

Filling With Beans & Opening The Slider

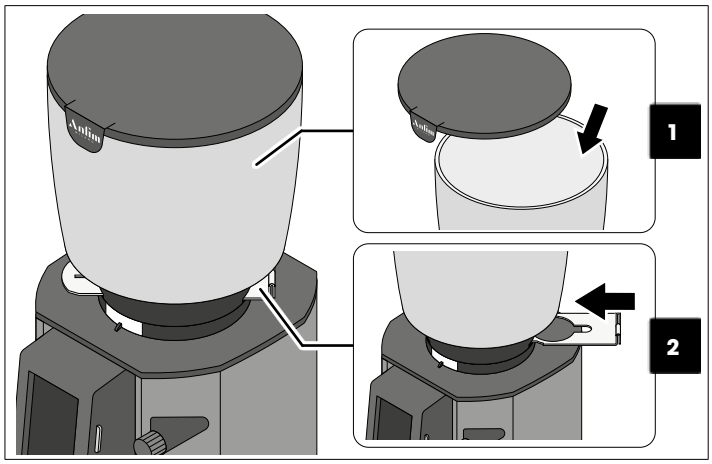

Switching The Grinder On/Off

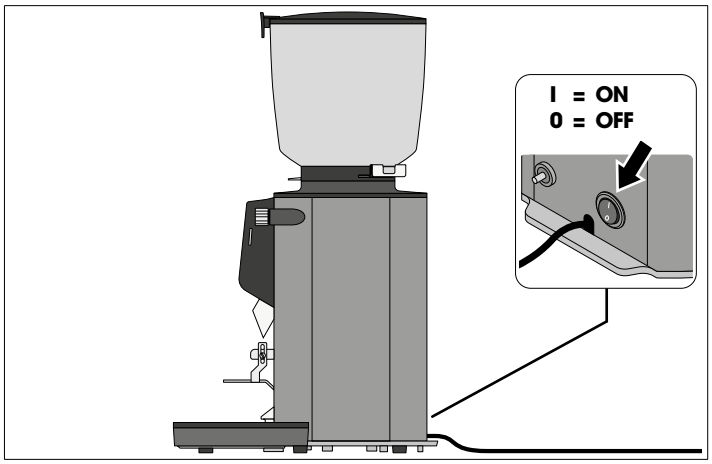


Operating The Grinder

Important:


For detailed operating information, see:

Software Manual


https://hemro.net/luna-alba-gbw-software-manual

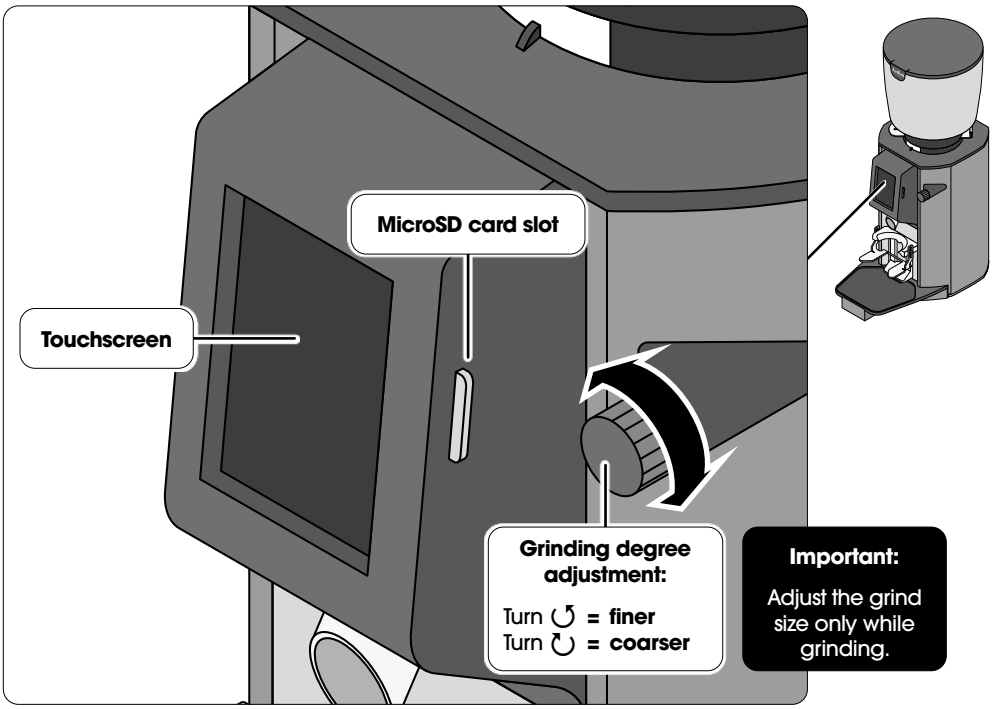

Starting The Grinding Process

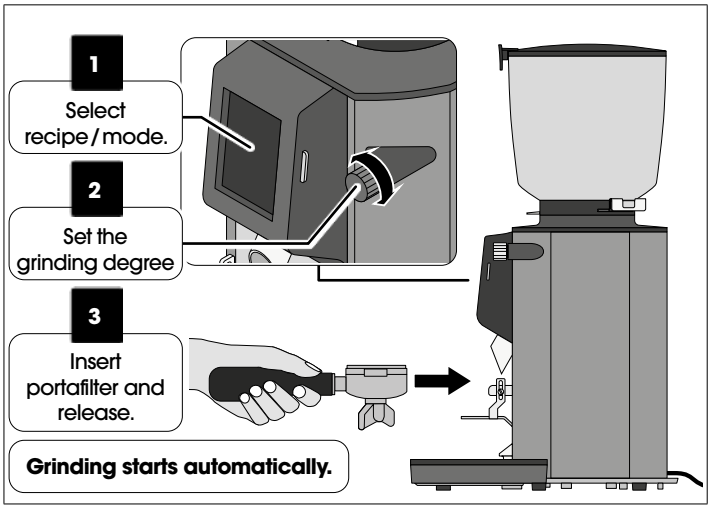

Regular Cleaning

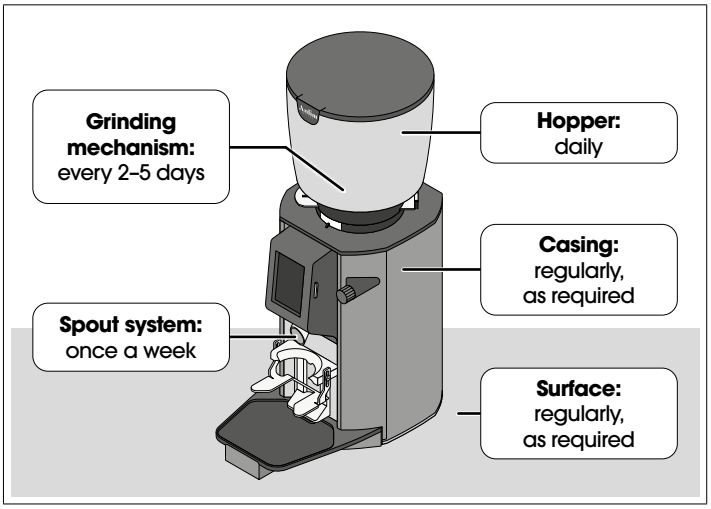

Technical data

Model:	**Luna GbW**	
Voltage | Frequency | Power:		
100 V | 50/60 Hz | 550/700 W	110–127 V | 60 Hz | 620 W	220–240 V | 50/60 Hz | 440/530 W
Protection type / Protection class:	IPX1 / I ⏚	
Idle speed (50 / 60 Hz):	1500 / 1800 rpm	
Grinding capacity (fine–coarse)[1]		
50 Hz:	~2.8 g/s [2]	
60 Hz:	~3.6 g/s [2]	

Max. permitted operating cycle[3]:	1 double espresso / min. (4 sec on / 26 sec off)
Recommended break:	26 sec
Max. daily output[1]:	8 kg
Sound emission value[4]:	74 dB(A)
Dimensions (W × H × D):	195 × 580 × 371 mm
Weight (net):	11.2 kg
Max. hopper filling quantity:	2 kg

1) The grinding capacity and the max. daily output depend on several factors, including the selected coffee bean (e.g. roast level, density), the chosen grind size, and the power supply.
2) Measured at a grind setting that yields 40 g of espresso from 18 g of ground coffee in 30 seconds of extraction.
3) Exceeding max. operating cycle may cause motor shutdown to protect internal components. Short extended runs are possible but must be followed by correspondingly longer pauses to prevent overheating or damage.
4) While grinding. Noise level measured under controlled laboratory conditions. Actual values may vary depending on the operating environment.

Version 2 | 11.2026 | Art.nr. 708235